

CM/50/G3



Description

CM/50/G3: "Patented" G3 high-efficiency metal filter, efficiency test no. 58/189 at the Politecnico di Torino


- fully washable

Construction:

- galvanised steel or AISI 304/316 stainless steel frame
- filter pack consisting of:
 - 12 layers of aluminium sock
 - 1 special flat inner layer
 - 2 external containment nets with special profile
- constant efficiency thanks to the special construction
- initial pressure drop with 2.7 m/s velocity: 100 Pa

ATEX version with earthing cable

Pressure drop diagram*

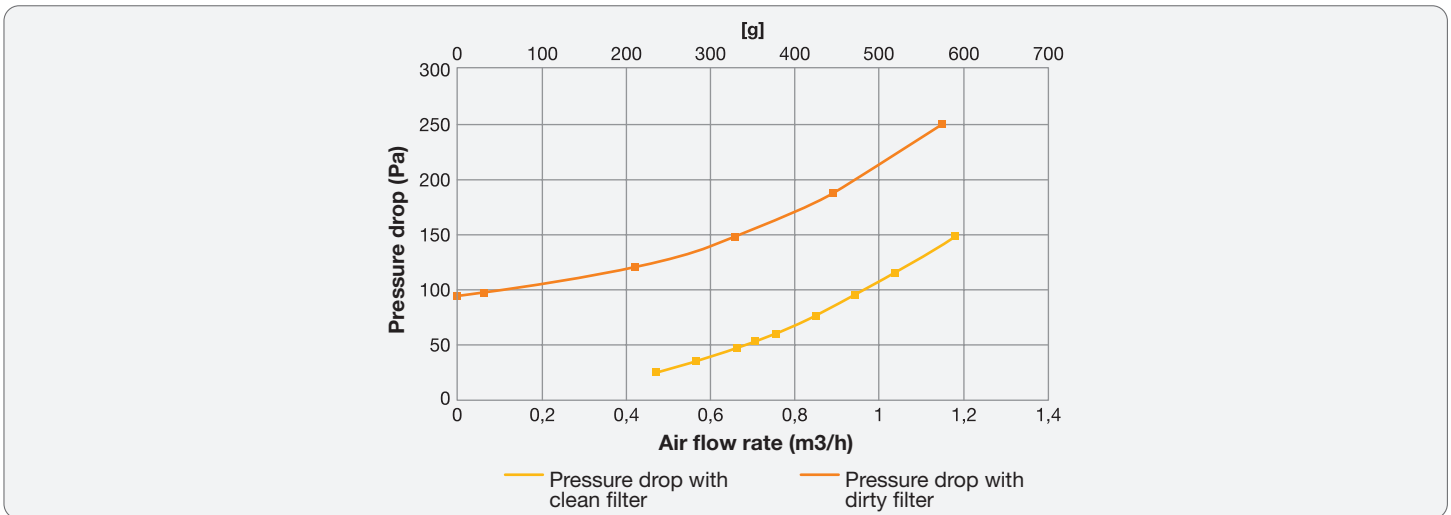

*: for 592x592 size

All prices are list prices for local market, for a quotation please contact us.

Price list

Dimensions	Galvanised frame	304 stainless steel frame
297x592	59	102
400x500	60	102
500x500	72	125
592x592	87	168
400x625	72	125
500x625	81	159

Dimensions

Dimensions	Thickness	Air flow rate (m ³ /h)*
297x592	48	1650
400x500	48	1940
500x500	48	2430
592x592	48	3400
400x625	48	2430
500x625	48	3040

*: air flow rate measured with 2.7 m/s velocity